


JX type wall mount enclosure (IP66)



JX type wall mount enclosure (IP66) is designed to accommodate various types of switchgear and control gear assemblies to suit a variety of electrical installations in commercial and light industrial premises. They are designed for outdoor applications up to IP66.

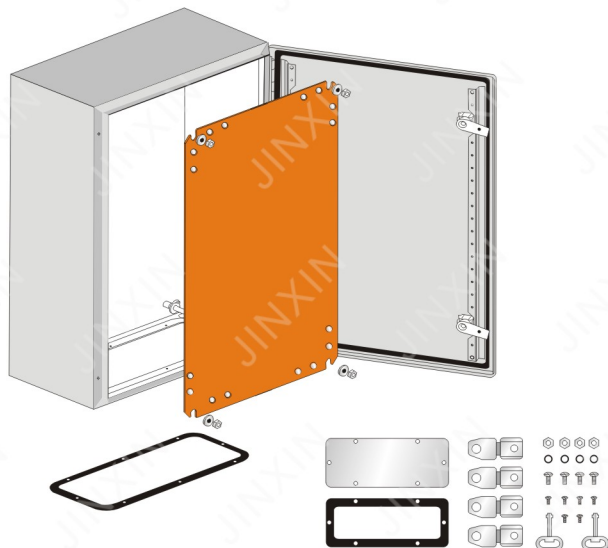

RoHS **CE** **IP66**

Supply include:

Enclosure and door, mounting plate, lock system, cable gland plate, sealing gasket and fixing accessories.
Standard configuration

Paint finish epoxy polyester powder coating textured finish
Color: RAL7032, RAL7035, RAL2000, etc.

Protection degree: IP66, IP65/NEMA 4X

Against mechanical impacts: IK 10

Mounting plate: Zinc-coated steel or RAL2000 orange color

Advantages:

- Option to change the opening direction
- The anti-corrosion coating prevents from rust forming
- Supplied with metal plate for fixing the electrical devices
- Locking mechanism which prevents from free access to the electrical materials mounted in the board




Polyurethane foamed gasket ensuring full watertightness (IP 66)



Door reinforcement frame available upon request.




Earthing between body and door by means of M6x15 welded studs. Screwed hinges easily removable allowing changing of door opening direction.

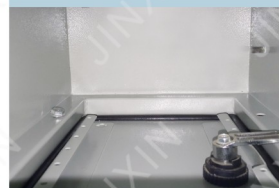

Internal view

JX type wall mount enclosure (IP66)

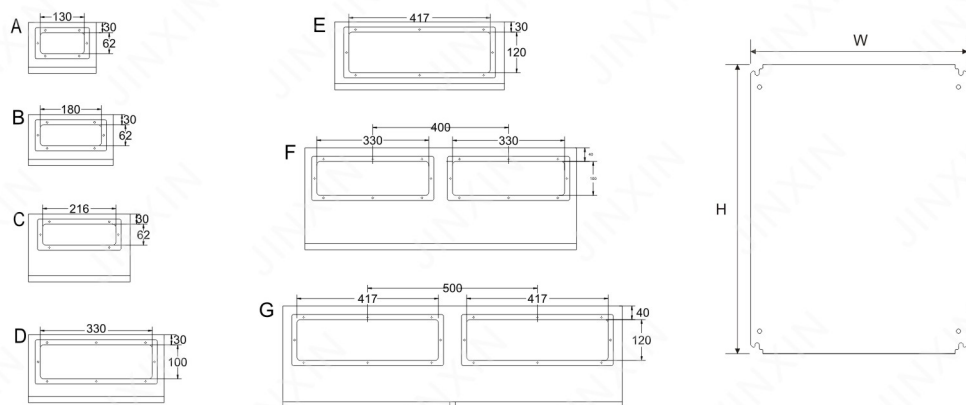



Selection Table

CAT.NO.	H	W	D	No. of lock	Gland open	M.P size
JX2-215	200	200	150	1	A	150x150
JX2-2515	250	200	150	1	A	200x150
JX2-315	300	200	150	1	A	250x150
JX2-320	300	200	200	1	A	250x150
JX25-315	300	250	150	1	B	250x200
JX25-320	300	250	200	1	B	250x200
JX25-325	300	250	250	1	B	250x200
JX3-315	300	300	150	1	B	250x250
JX3-320	300	300	200	1	B	250x250
JX3-325	400	300	250	1	C	350x250
JX3-415	400	300	150	1	C	350x250
JX3-420	400	300	200	1	C	350x250
JX3-425	400	300	250	1	C	350x250
JX3-430	400	300	300	1	C	350x250
JX4-415	400	400	150	1	C	350x350
JX4-420	400	400	200	1	C	350x350
JX4-425	400	400	250	1	C	350x350
JX4-430	400	400	300	1	C	350x350
JX3-515	500	300	150	1	C	450x250
JX3-520	500	300	200	1	C	450x250
JX3-525	500	300	250	1	C	450x250
JX3-530	500	300	300	1	C	450x250
JX4-515	500	400	150	1	C	450x350
JX4-520	500	400	200	1	D	450x350
JX4-525	500	400	250	1	D	450x350
JX4-530	500	400	300	1	D	450x350
JX5-520	500	500	200	1	D	450x450
JX5-525	500	500	250	1	D	450x450
JX5-530	500	500	300	1	D	450x450
JX4-615	600	400	150	2	C	550x350
JX4-620	600	400	200	2	D	550x350
JX4-625	600	400	250	2	D	550x350
JX4-630	600	400	300	2	D	550x350
JX5-620	600	500	200	2	C	550x450
JX5-625	600	500	250	2	D/E	550x450
JX5-630	600	500	300	2	D/E	550x450
JX6-615	600	600	150	2	C	550x550
JX6-620	600	600	200	2	D	550x550
JX6-625	600	600	250	2	D/E	550x550

CAT.NO.	H	W	D	No. of lock	Gland open	M.P size
JX4-730	700	400	300	2	D	650x350
JX5-715	700	500	150	2	C	650x450
JX5-720	700	500	200	2	D	650x450
JX5-725	700	500	250	2	E	650x450
JX5-730	700	500	300	2	E	650x450
JX6-720	700	600	200	2	D	650x550
JX6-725	700	600	250	2	E	650x550
JX6-730	700	600	300	2	E	650x550
JX6-820	800	600	200	2	D	750x550
JX6-825	800	600	250	2	E	750x550
JX6-830	800	600	300	2	E	750x550
JX8-820	800	800	200	2	D	750x750
JX8-825	800	800	250	2	E	750x750
JX8-830	800	800	300	2	E	750x750
JX6-1020	1000	600	200	2	D	950x550
JX6-1025	1000	600	250	2	E	950x550
JX6-1030	1000	600	300	2	E	950x550
JX7-1020	1000	700	200	2	D	950x650
JX8-1020	1000	800	200	2	D	950x750
JX8-1025	1000	800	250	2	F	950x750
JX8-1030	1000	800	300	2	F	950x750
JX10-1025	1000	1000	250	3	G	950x950
JX10-1030	1000	1000	300	3	G	950x950
JX6-1220	1200	600	200	2	D	1150x550
JX6-1225	1200	600	250	2	E	1150x550
JX6-1230	1200	600	300	2	E	1150x550
JX8-1220	1200	800	200	2	E	1150x750
JX8-1225	1200	800	250	2	E	1150x750
JX8-1230	1200	800	300	2	E	1150x750
JX10-1225	1200	1000	250	3	G	1150x950
JX10-1230	1200	1000	300	3	G	1150x950
JX12-1225	1200	1200	250	3	G	1150x1150
JX12-1230	1200	1200	300	3	G	1150x1150

More size can be request by customized

JX type wall mount enclosure (IP66)


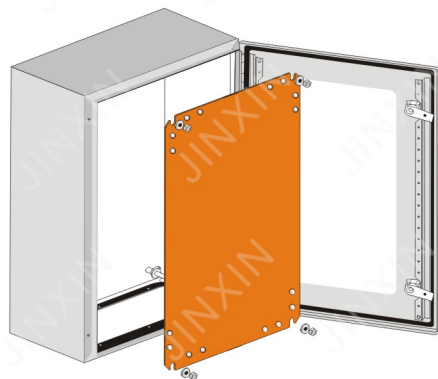


JXP-plexiglass



JXP Supply include:

Enclosure and door (Plexiglass door), mounting plate, lock system, cable gland plate, sealing gasket and fixing accessories.

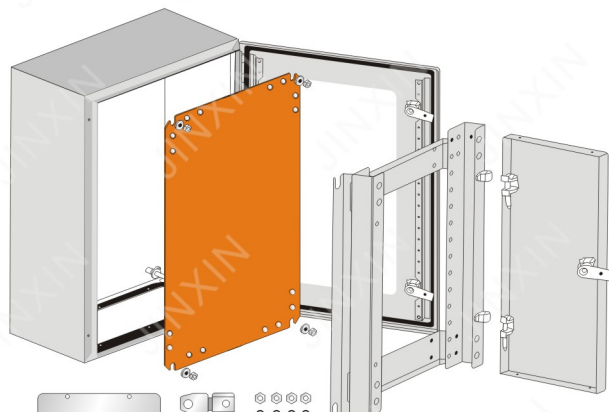


JXIP-plexiglass-inner door



JXIP Supply include:

Enclosure and door (Plexiglass , Inner door), mounting plate, lock system, cable gland plate, sealing gasket and fixing accessories.



JX type wall mount enclosure (IP66)

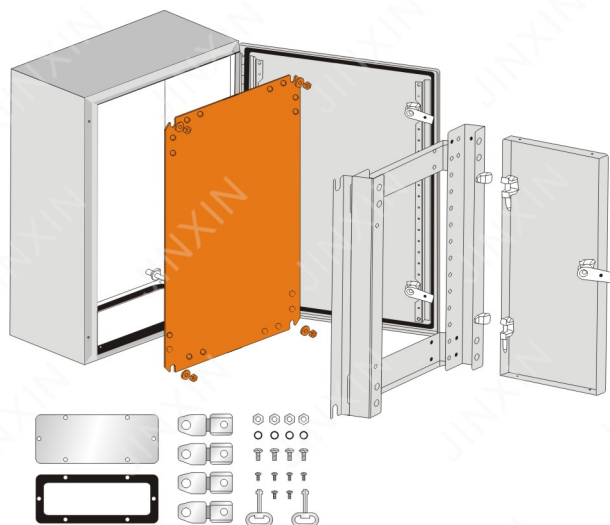

JX inner door design wall mount enclosure

Supply include:

Enclosure and door (Inner door),
mounting plate, lock system, cable gland plate, sealing gasket
and fixing accessories.


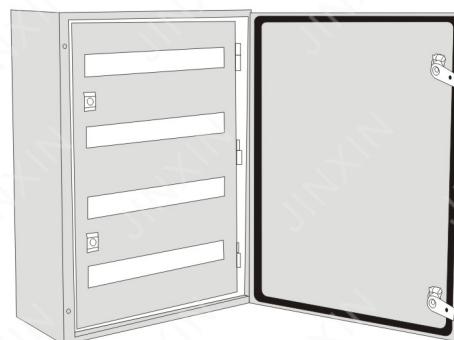
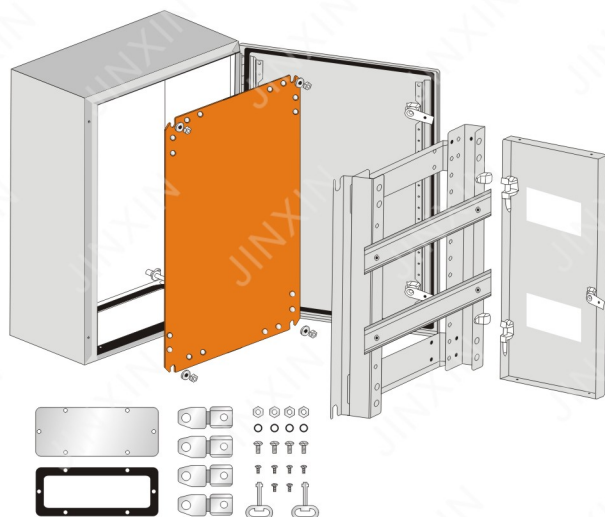


JX inner door chassis design wall mount enclosure

Supply include:


Enclosure and door ,chassis
mounting plate, lock system, cable gland plate, sealing gasket
and fixing accessories.

JX type wall mount enclosure (IP66)

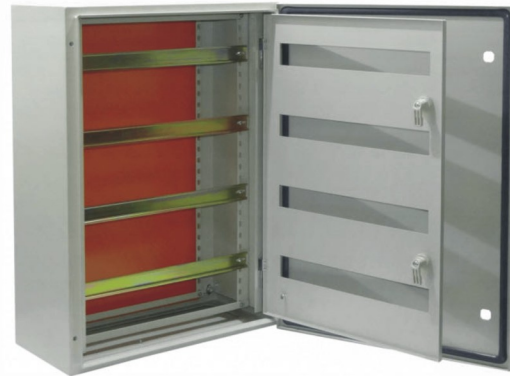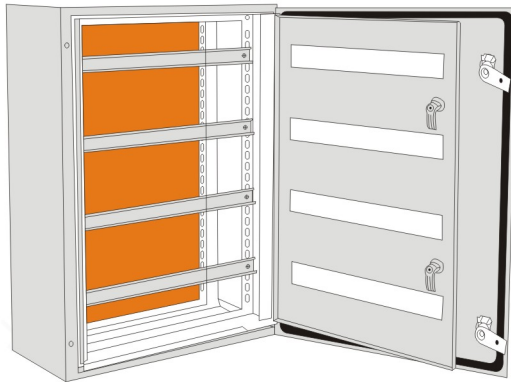

JXREMOVEABLE-Chassis Supply include:

Enclosure and door (Removeable-chassis), mounting plate, lock system, cable gland plate, sealing gasket and fixing accessories.

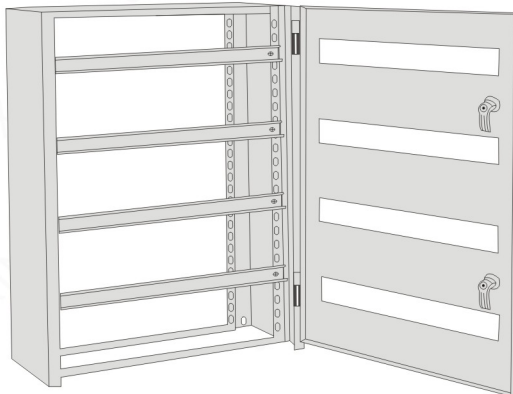


REMOVEABLE-Chassis



REMOVEABLE-Chassis

JX type wall mount enclosure (IP66)

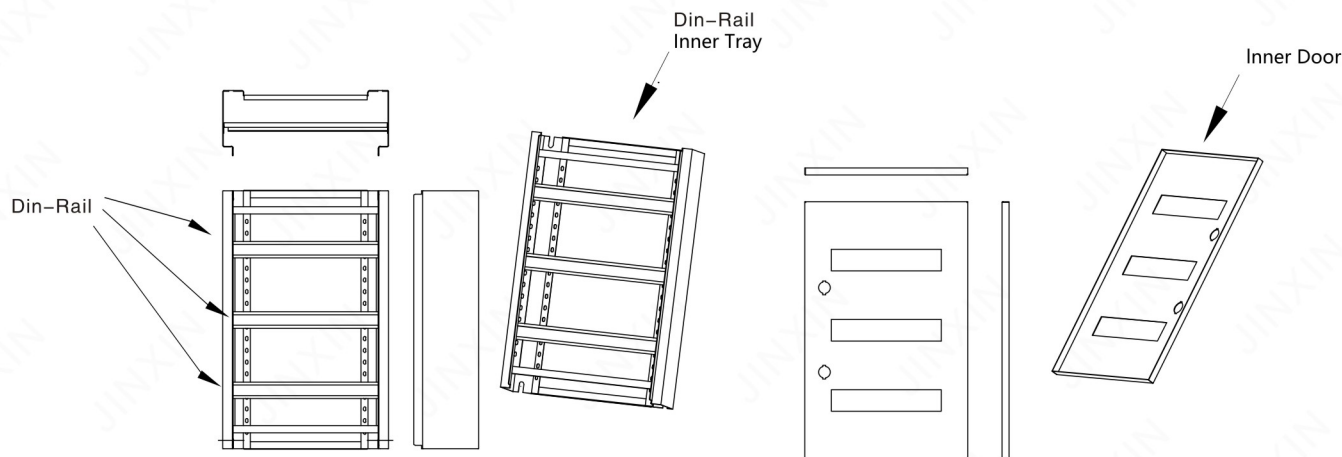

The JXremoveable -chassis is used to install in the JX enclosure for circuitbreakers inside.The chassis cover is 40mm-85mm big, made of sheet steel in 1.2mm thick, by using the standard 35mm DINrails inside to adjust the distance.

Epoxy thermosetting powder coating texturrd finish,color in RAL 7032 & RAL 7035.

Selection Table

Model	H × W × D	No.of lock	NO.of breaks
JX-chassis: 3-420	400x300x200	1	2row*10P
JX-chassis: 4-520	500x400x200	1	3row*15P
JX-chassis: 4-620	600x400x200	2	3row*15P
JX-chassis: 5-720	700x500x200	2	4row*21P
JX-chassis: 5-725	700x500x250	2	4row*21P
JX-chassis: 6-820	800x600x200	2	4row*26P
JX-chassis: 6-825	800x600x250	2	4row*26P
JX-chassis: 6-830	800x600x300	2	4row*26P
JX-chassis: 6-1025	1000x600x250	2	6row*26P
JX-chassis: 6-1030	1000x600x300	2	6row*26P
JX-chassis: 8-1030	1000x800x300	3	6row*38P
JX-chassis: 8-1230	1200x800x300	3	6row*38P

More size can be request by customized